

HDK dew sensor is a high response dew sensor to protect equipment from dew.


■ Features

- Small, light
- High response and reliable dew detection
- High reliability


■ Applications

- VTR
- Camera
- Copier

■ Dimensions

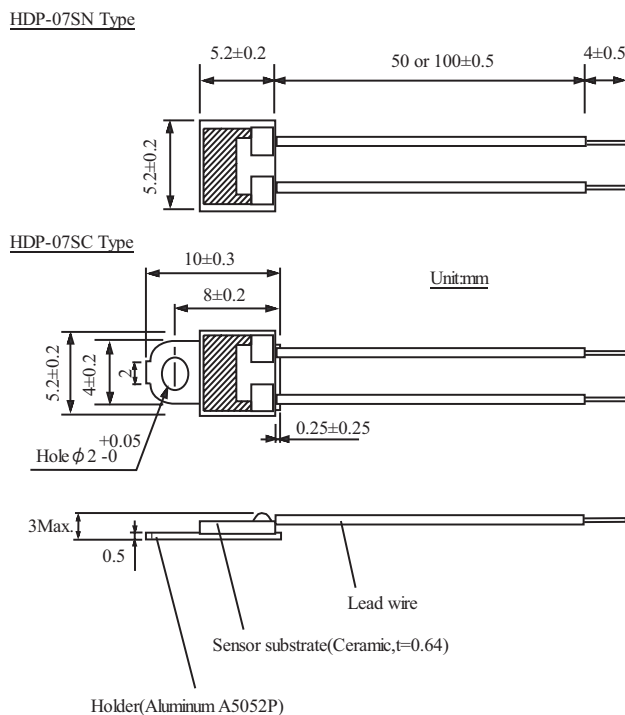

■ Typical Characteristics

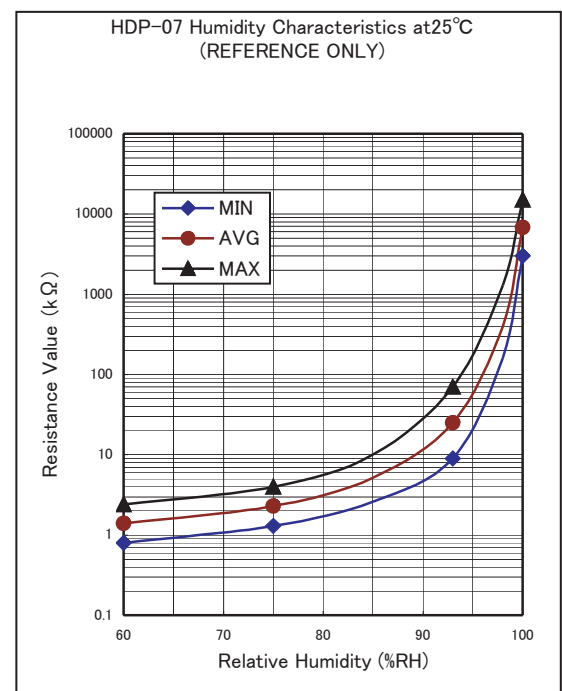

■ Specifications

Item	HDP-07SN1	HDP-07SN2	HDP-07SC1	HDP-07SC2	Unit
Element Size	5.2×5.2				mm
Lead Length	50	100	50	100	mm
Mounting Plate (Holder)	None		Yes		-
Working Voltage	AC,DC 0.8V Max. (2mW)				V
Working Temperature Range	+1~+60				°C
Working Humidity Range	0~100				%RH
Response	200kΩ Min. within 10 sec.				-
Resistance(25°C)	75%RH:20kΩ Max., 93%RH:100kΩ Max., 100%RH:200kΩ Min.				Ω

深圳市新世联科技有限公司

地址：深圳市深南中路2066号华能大厦712室
 电话：0755-83680810 83680820 83680830 83680860
 网址：www.apollounion.com

邮编：518031
 传真：0755-83680866
 邮箱：sales@apollounion.com