


DATA SHEET

Liquid Level Switches

Optomax Basic Series

FEATURES

- Liquid level switches that can detect almost any liquid type; oil or water based
- Choice of material; Polysulfone (standard) or Trogamid®
- Choice of threads and terminal connections

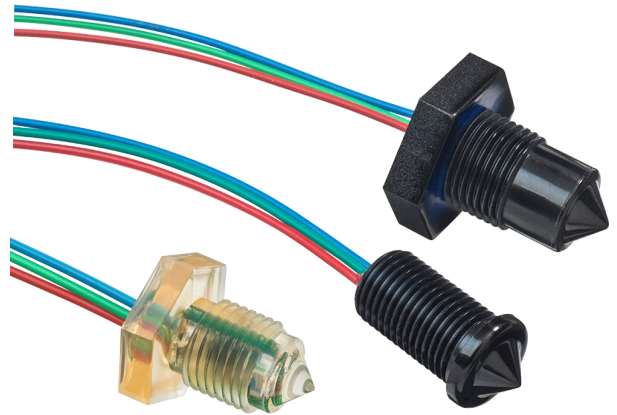

Housing/ Mounting <ul style="list-style-type: none"> M10x1 M12x1 1/4" NPT 1/2" SAE 	Output Type / Logic <ul style="list-style-type: none"> CUSTOMER PROVIDES PHOTO-TRANSISTOR 	Supply Voltage <ul style="list-style-type: none"> CUSTOMER PROVIDES 3.3 - 24 V VOLTAGE 	Output Current <ul style="list-style-type: none"> CUSTOMER PROVIDES 4mA CURRENT 	Temp <ul style="list-style-type: none"> -25°C to +80°C TEMPERATURE
---	--	---	--	--

BENEFITS

- OEM optics only solution¹
- Low cost
- Compact design

OUTPUT VALUES

Refer to [Circuit Diagram](#) section on page 3 for details.

TECHNICAL SPECIFICATIONS

Supply voltage (Vs)	Any with suitable LED current limiting resistor	Operating temperatures	Standard: -25°C to +80°C
LED forward current (If)	10mA recommended	Storage temperatures	Standard: -30°C to +85°C
Output signal	Phototransistor open collector. Refer to Circuit Diagram section on page 3	Housing material ²	Polysulfone or Trogamid®
		Sensor termination	24AWG, 250mm PTFE wires, 8mm tinned

NOTES


- 1) Minimum order quantity of 500 applies.
- 2) Before use check that the fluid in which you wish to use these devices is compatible either with Polysulfone or Trogamid®.

ApolloSense Ltd


OUTLINE DRAWING

All dimensions shown in mm. Tolerances = ±1mm.


LLx500 Series

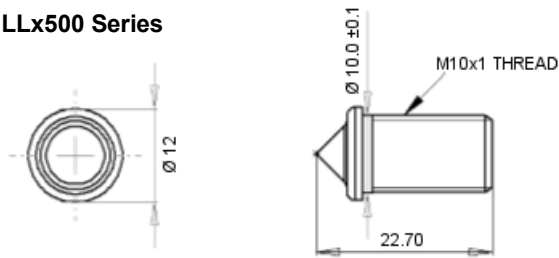


LLx200 Series

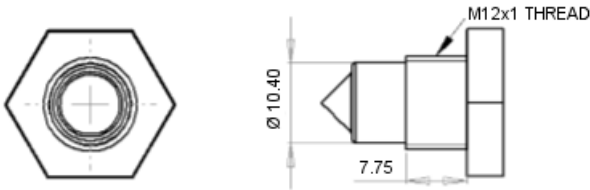

LLx600 Series

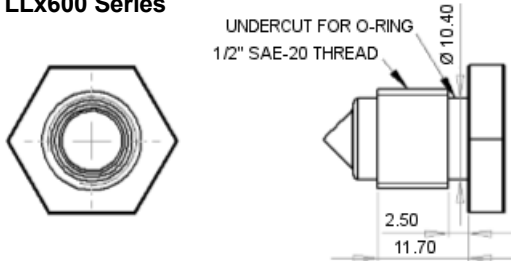

LLx700 Series

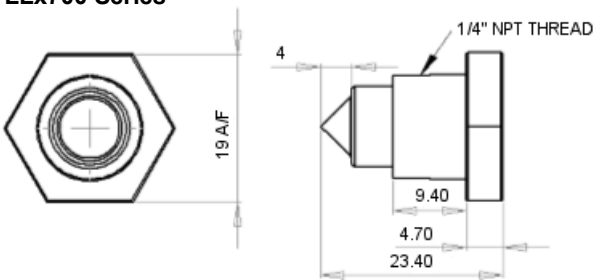

HOUSING SPECIFICATIONS

	Housing Series			
	500	200	600	700
Thread	M10x1	M12x1x8g with hex nut ¹	1/2" SAE with O-ring ¹	1/4" NPT ²
Pressure	20 bar / 209 psi max.	7 bar / 101 psi maximum		
Tightening Torque	1.5 Nm / 13.26 in-lbs maximum			

ELECTRICAL INTERFACE



Flying Leads—3-wire option

Wire	Designation
Red	LED _{ANODE}
Green	Output
Blue	0V

Flying Leads—4-wire option

Wire	Designation
Red	LED _{ANODE}
Green	Output
Blue	0V LED
Black	0V Phototransistor

ApolloSense Ltd

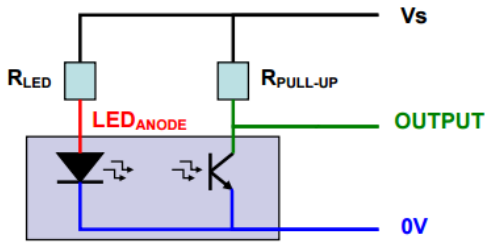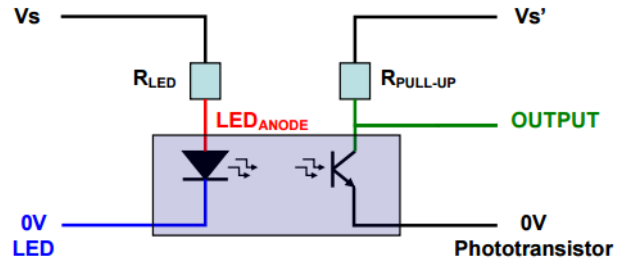Flying Leads—3-wire option

Flying Leads—4-wire option


Note: The 4-wire version provides galvanic isolation between input (IR-LED) and output (Phototransistor).

Pre-selected R_{LED} and $R_{PULL-UP}$ Value for Different Supply Voltages				
V_s	R_{LED}	$R_{PULL-UP}$	V_{OUTPUT} in Air	V_{OUTPUT} in Water
3.3V	200R	2K	< 0.75V	> 2.5V
5V	360R	2K	< 1V	> 4.25V
8V	680R	2.5K	< 1.5V	> 7.25V
12V	1K	3K	< 3V	> 11.25V
15V	1.3K	3.5K	< 3.25V	> 14.25V
24V	2.2K	4K	< 10.5V	> 22.5V

Typical installation: You must select suitable resistors for your chosen supply voltage. Forward voltage of LED is 1.3V and LED current should be 10mA (depending on application liquid). Therefore, for a supply of $V_s = 5V$ for example:

$$R_{LED} = \frac{(V_s - 1.3)V}{10mA} = \frac{5 - 1.3}{0.01} = 370\Omega \approx 360\Omega \text{ (standard value)}$$



CAUTION: Failure to select the correct resistor values may result in damage to the sensor. The minimum value of $R_{PULL-UP}$ should not exceed $V_s/\text{max output current}$.

Note: Shorting the output to V_s will result in irreparable damage to the sensor.

ORDER INFORMATION

Generate your specific part number using the convention shown opposite. Use only those letters and numbers that correspond to the sensor and output options you require — omit those you do not.

Sensor mounted from inside vessel

L L X 5 0 0 A X

Housing Material	Housing Type	Termination
C Polysulfone	5 500 series M10x1	3 3-wire output
T Trogamid®		4 4-wire

Sensor mounted from outside vessel

L L X X 0 0 A X S H

Housing Material	Housing Type	Termination
C Polysulfone	2 200 SH series M12x1	3 3-wire output
T Trogamid®	6 600 SH series 1/2" SAE	4 4-wire output
	7 700 SH series	

Notes:

- 500 series sensors are mounted internally
- 200, 600 & 700 series sensors are mounted externally
- SH suffix applicable to 200, 600 & 700 series sensors only; omit from 500 series sensor part number

! CAUTION

Do not exceed maximum ratings and ensure sensor(s) are operated in accordance with their requirements.

Carefully follow all wiring instructions. Incorrect wiring can cause permanent damage to the device.

ApolloSense Ltd recommend using alcohol based cleaning agents. Do NOT use chlorinated solvents such as trichloroethane as these are likely to attack the sensor material.

Failure to comply with these instructions may result in product damage.

i INFORMATION

As customer applications are outside of ApolloSense Ltd.'s control, the information provided is given without legal responsibility. Customers should test under their own conditions to ensure that the equipment is suitable for their intended application. Before use, check that the fluid in which you wish to use these devices is compatible with Polysulfone or Trogamid®.

General Note: ApolloSense Ltd. reserves the right to make changes to product specifications without notice or liability. All information is subject to ApolloSense Ltd.'s own data and considered accurate at time of going to print.

ApolloSense Ltd